



# ISL-V5S Lift Controller

## With Can Bus Serial Communication

### Product Description

In **ISL\_V5S** Controllers a 4 wire **Can Bus** serial communication is used between **SERI-24** main board and the **serial nodes** of cabin and landing stations. For cabin connections a 20Pole flat cable is required for the complete range of ISL-V5 controller applications.

#### ISL\_V5S features:

- Up to 24 stops Down Collective / Full Collective
- Group operation up to 2 lifts
- Double cabin door independent control
- Built in, 4 line graphic LCD display user interface with access code
- Real time clock
- Fully complied with EN81.1-2 and GOST regulations
- Multilingual support (Greek, English, French, Russian)
- Automatic rescue function (Standard in hydro version)
- Cabin MP3 Player with gong and floor announcement
- MR and MRL controller version
- Special VVVF for Hydraulic applications (Optional)

### Technical specifications

**ISL\_V5S** controllers comes with a **2 years guaranty** and are produced for a long life trouble free operation.

#### Electrical features:

- Safety Voltage: 110Vac / 48Vdc
- Lightning Output: 230Vac / 10A
- Calls / Indicators Voltage: 12 / 24 Vdc


#### Components:

Din Rail MCB: LG, Cat C, Korea  
Micro Relay: Finder, 8-10A, Germany  
Main Contactors: Schrack, Cat AC3, Austria  
VVVF: DELTA VFD-ED (Traction) / VFD-E-M LIFT (Hydro), Cat Lift, Manufactured in Holland and Slovakia

#### Factory - Head Office:

Perrevou 37, Thessaloniki  
54 352, Greece  
Tel.: 0030 231 220 9009  
Fax: 0030 2310 943 169

info@istechonology  
www.istechonology.gr

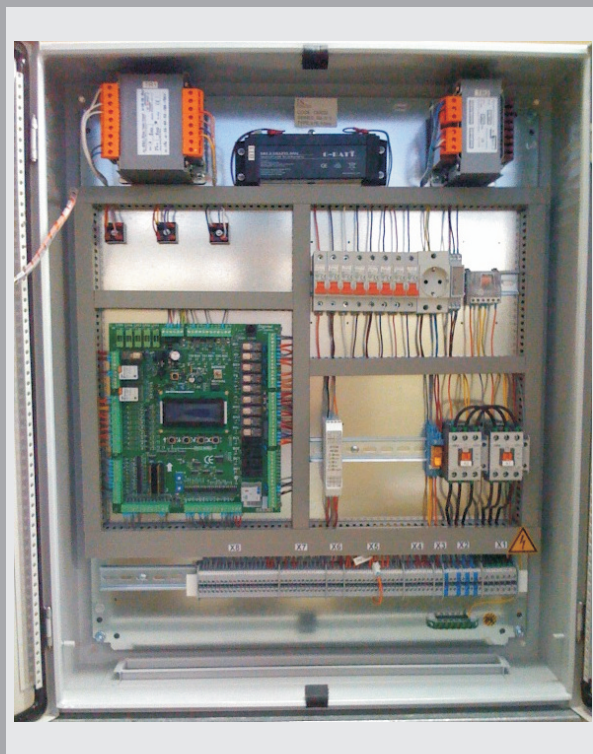

### CAN BUS Serial communication

